



## Vertiv™ Liebert® CRV4

25 kW to 60 kW

4<sup>th</sup> Generation Row-Cooling  
with Elevated Performance





## Designed to Enhance Data Center Cooling Performance

The Vertiv™ Liebert® CRV4 thermal management solution is a row-based solution designed to provide maximum cooling in a compact footprint. The solution provides the highest efficiency and availability by removing heated air from the data center hot aisle and using it to return cooled air to the servers (cold aisle).


The Liebert CRV4 includes all of the critical functions fundamental to cooling units such as: humidification, dehumidification, re-heating, air filtration, condensation management, temperature and humidity control, alarm functions and data communications

A stand-alone, direct expansion system with variable capacity, available in both 300 mm (25 kW) and 600 mm (35, 45 & 60 kW) versions, complete with roof or wall-mounted condenser. The Liebert CRV4 series enhances capacity range as well as offers superior performance over all the available row cooling solutions in the marketplace.

It is ideally suited for rack-level cooling, specifically designed for high return air temperatures. The Liebert CRV4 optimizes air distribution and maximizes efficiency, delivering both cost and economical operation.

Below mentioned graphical representation shows ultra efficiency by Liebert CRV4 at different load conditions.

Liebert® CRV4 Unit

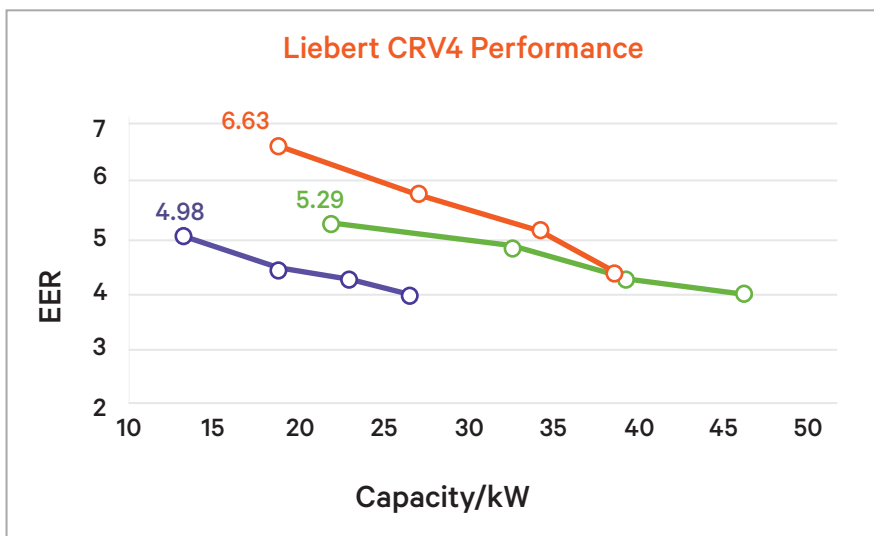

## Liebert CRV4: Achieving one of the best EER credentials in the market

This capacity vs EER (without condenser power) graph is drafted considering indoor return air temperature at 37 °C C DBT & relative humidity of 24 %, while condensing temperature is 45 °C. It is seen that during partial load, EER value is maximum for any model and energy efficiency is much better than legacy series & any other available solution in market.

○ CRV025      ○ CRV035      ○ CRV045




- Suitable for small computer rooms to large data centres

- Suitable for high density heat loads (>8 kW / rack)


- Able to provide cooling with or without raised floor

- Thermal Group Control for up to 16 units

## Liebert CRV4: Configuration

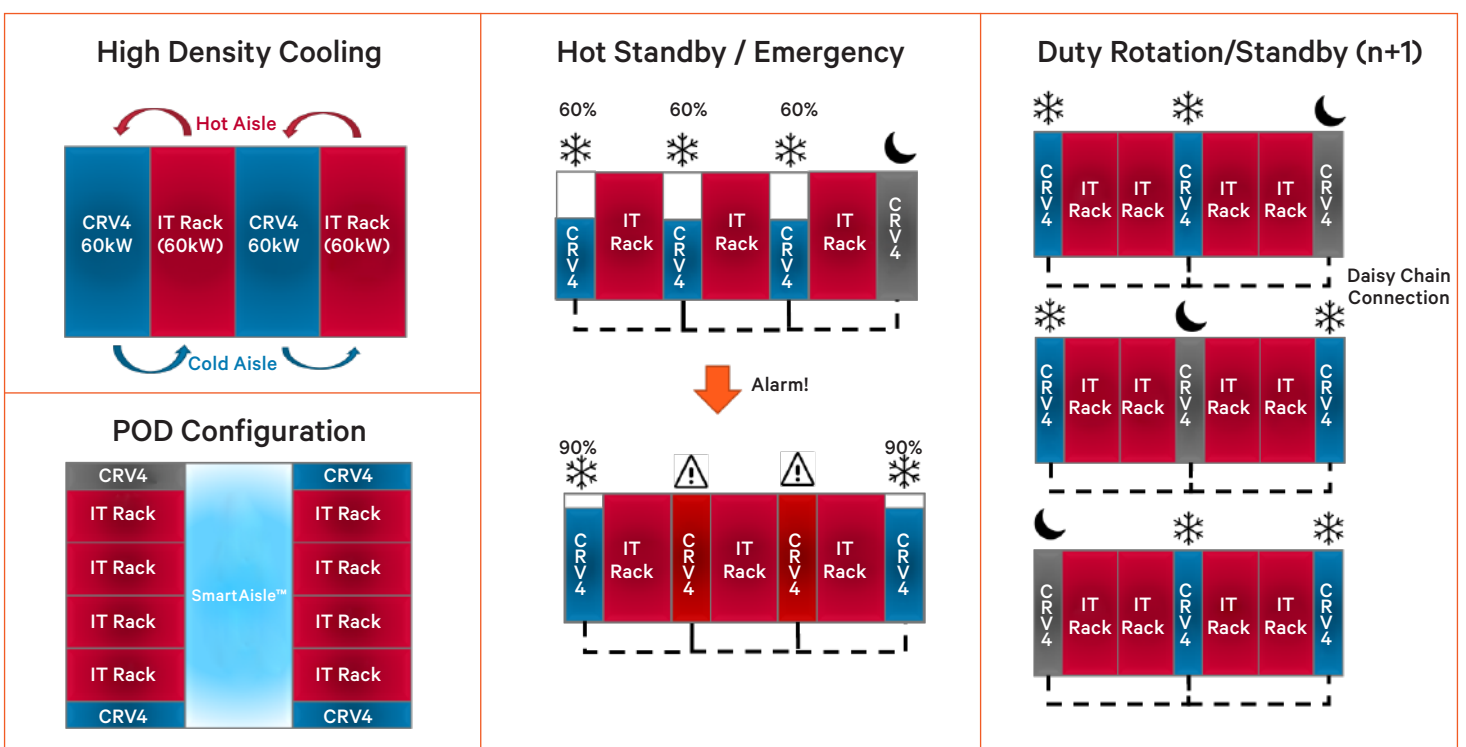

Industry-leading features

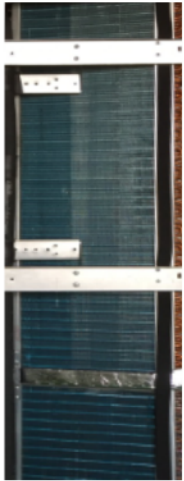

**Evaporator Coil Design**

- The finned tube evaporator with high heat dissipation efficiency is used. R&D has produced evaporator designs with increased efficiency by ensuring that the refrigerant is distributed evenly in each loop.



**Variable Capacity Brushless DC Inverter Compressor**

- DC inverter compressor technology provides infinite variable capacity modulation between 30% - 100% to ensure precise response to dynamic changing cooling demand.
- Improved reliability by reducing compressor cycling and component wear.
- Environment-friendly R410A refrigerant.



**Additional Features**

Long Piping Kit

Steam Humidifier

Wind-leading Grill

PTC Heater



**Flexible Operations**

- Variable capacity for different loading
- Air volume quantity can be varied as per load density



**Diversified Allocation**


- Best suited for >8kW/Rack load
- High heat density application with hot/cold aisle row cooling

## all in one solution



### Flexible Fan Operation

- The EC fan speed is automatically regulated by the CRV4 smart controller.
- High efficiency EC fans saves energy and its hot swappable design allows replacement while the unit is running.

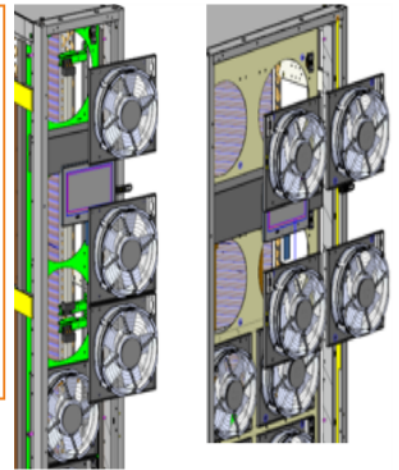

### Electronic Expansion Valve (EEV)

- Allows for integrated and optimal variable capacity control.
- Maintain constant superheat & dehumidification assistance.



## additional Features

Low Temp Kit

Dual Power

Air-filter Clog Switch

Water Leak Detector



### Lower Operational Cost

- High return temp design leads to more energy saving
- Small footprint releases space for IT equipment



### High Reliability

- High degree precision controls by smart controller
- Better longevity

## CRV4 Smart Controller, A Drive to the Highest Efficiency Levels

- 7" large touch screen color display with HMI version
- Advanced control algorithms allow the airflow and cooling to be modulated independently,
- Multiple control modes (six) for fan and compressor.
- Built in RS485 interface for Modbus, optional SNMP and TCP/IP interface




## Intelligent Thermal Controls for Smarter Management

Make smarter decisions in your critical infrastructure space with integrated intelligent controls for ease of management. The Liebert CRV4 is equipped with Intelligent Controls, allowing users to easily manage up to 16 units.

### Via Liebert® teamwork

Rotation Control

Alarm Standby Control

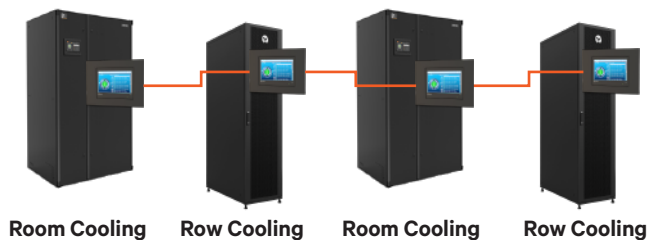

- Up to 16 units can be configured in a team to rotate based on day and time.
- Units which are idle but ready become active in the event of an alarm condition in one of the operating units or based on a rotation schedule.


## Technical Specifications

Model	CR025	CR035	CR045	CR060
Cooling Mode <sup>[1]</sup>	Air-cooled	Air-cooled	Air-cooled	Air-cooled
Total capacity (kW) <sup>[2]</sup>	28.8	40.9	47.5	57.6
Max airflow (m <sup>3</sup> /h)	5500	8500	10200	10200
Rated airflow (m <sup>3</sup> /h)	5200	8000	9500	9500
Reheat (kW) <sup>[3]</sup>	3	6	6	6
Humidifier (kg/h)	1.5	1.5	1.5	1.5
FLA (A)	24.1	33.4	45.7	54
Electrical Power	380 V to 415 V / 3 Ph / 50 Hz & 60 Hz			
Net weight (kg)	255	350	365	375
Dimension (RA model) (H x W x D) (mm)	2000 x 300 x 1100	2000 x 600 x 1100	2000 x 600 x 1100	2000 x 600 x 1100
Dimension (HA model) (H x W x D) (mm)	2000 x 300 x 1200	2000 x 600 x 1200	2000 x 600 x 1200	2000 x 600 x 1200

## Liebert® CRV4 Condenser Configuration

### Liebert LSF Condenser (LxWxH)


Model	35 °C	40 °C	45 °C
CR025	LSF38-R3 (1384x695x990)	LSF42-R3 (1584x695x1273)	LSF52-R3 (1584x695x1273)
CR035	LSF42-R3 (1584x695x1273)	LSF52-R3 (1584x695x1273)	LSF76-R3 (2384x695x1273)
CR045	LSF52-R3 (1584x695x1273)	LSF76-R3 (2384x695x1273)	LSF85-R3 (2384x695x1273)
CR060	LSF70-R3 (1884x689x1273)	LSF76-R3 (2384x695x1273)	LSF85-R3 (2384x695x1273)

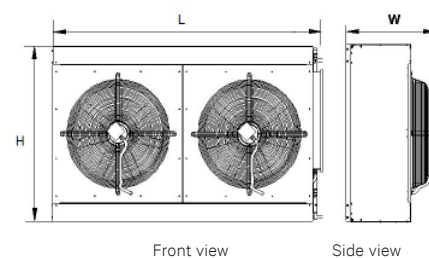

Liebert® LSF™ Unit

### Liebert LVC Condenser \*Each LVC must pair with 2 identical CRV (LxWxH)

Model	35 °C	40 °C	45 °C
2 x CR025	/	LVC088 (2330x1100x1744)	LVC106 (2330x1100x1744)
2 x CR035	LVC088 (2330x1100x1744)	LVC106 (2330x1100x1744)	LVC152 (2330x1250x2222)
2 x CR045	LVC106 (2330x1100x1744)	LVC152 (2330x1250x2222)	LVC170 (2330x1250x2222)
2 x CR060	LVC140 (2330x1250x2222)	LVC152 (2330x1250x2222)	LVC170 (2330x1250x2222)



Liebert® LVC™ Unit

Note:

1. Water Cooled option model is available, please contact Vertiv local representative for more info.
2. Performance based on 37 °C return air temperature, 24% relative humidity and 45°C condensing temperature
3. If the required data is not listed in the table please contact Vertiv local representative.

